

**BOSCH**
Invented for life

Security Escort Overview




- ▶ Tracks people or assets
- ▶ Sends alarms to a system operator who can dispatch help during emergencies
- ▶ Identifies user's name, location, and direction of travel every seven seconds during an alarm
- ▶ Tracks patients who wander away from designated areas
- ▶ Manages assets
- ▶ Has full range of transmitter types and capabilities
- ▶ Provides indoor and outdoor protection for:
- ▶ Post-alarm tracking and alarm map recall and database
- ▶ Man-down alarm and officer tracking in security installations
- ▶ Guard tour and staff tracking reports

The Security Escort System is a wireless system that allows a person to signal for help during an emergency or that tracks the unauthorized movement of a person or an item. The central console software receives the alarm signal and shows a person or item's identification, location on a map, and the direction of travel. The operator uses this information to direct personnel to the scene of the emergency.

The Security Escort System provides indoor or outdoor floor-by-floor coverage and patented testing and supervision features.

System Overview

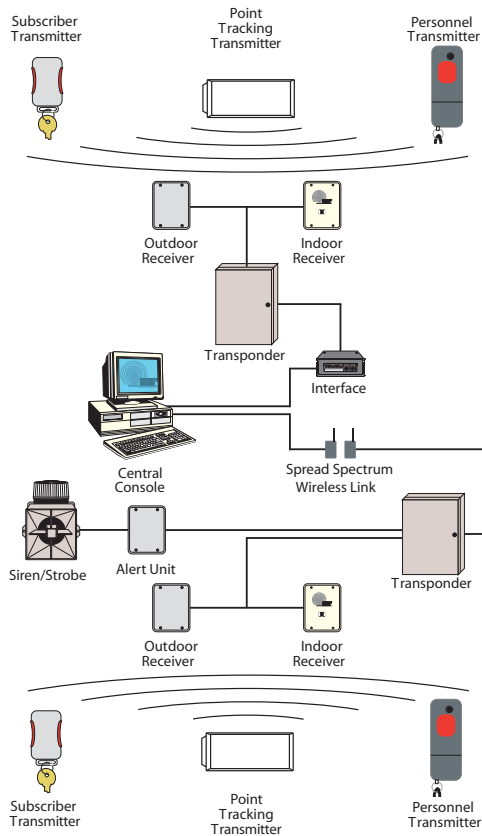

During an emergency situation:

- The transmitter sends a signal identifying the person or asset to the receivers.
- The receivers forward this information to the transponder.
- The transponder forwards the information to the central console.
- The central console displays the person's or asset's name, description or pertinent information, picture, and current location on a map.
- The transmitter sends a signal every seven seconds, so that the location of the alarm is constantly updated and displayed at the central console.

Installation/Configuration Notes

The Security Escort System consists of five basic components: transmitters, receivers, alert units, transponders, and the central console.

Transmitters	Miniature radio transmitters that send distress, alarm, or test signals.
Receivers	Devices placed throughout a protected area to detect the radio transmissions from transmitters. Receives alarm information and relays it to the transponder. Indoor receivers provide local sounders and visual test confirmation. Outdoor receivers have weather-resistant enclosures.
Alert Units	Output modules that activate third-party signaling devices, such as siren and strobe units, during an alarm.
Transponders	Devices that control groups of receivers and alert units connected to them. Each transponder relays alarm and test signals from the receivers to the central console. Transponders also test for device and wiring faults, and transmit problem conditions to the central console.
Central Console	A computer and an optional backup computer that receives alarm and trouble signals from the transponders. Central console software controls system operation and houses databases. It also analyzes the signals, activates strobes and sirens connected to the alert units, and shows the security dispatcher a display that includes the person's or asset's location and information during an alarm event.

Technical Specifications

Number of...

Transponders:	255 for each system
Receivers:	64 for each transponder
Alert Units:	64 for each transponder
Transmitters:	50,000 for each system

Product Overview for Security Escort

Here is a list of Security Escort products offered by Bosch Security Systems.

Product	Description
SE2005 Central Console Software	Accepts 500 subscribers (users).
SE2010 Central Console Software	Accepts 1,000 subscribers (users).
SE2050 Central Console Software	Accepts 5,000 subscribers (users).
SE2100 Central Console Software	Accepts 10,000 subscribers (users). Software for more than 10,000 subscribers available on request. Contact Bosch for details.
EA500B Transponder	Device controller for up to 64 receivers and alert units.
EA102A-304 Receiver	Detects an alarm from a transmitter and sends the signal to the transponder.
EA120B Alert Unit	Activates devices such as strobe units during an alarm and reports tampering, AC power loss, and the backup battery level to the transponder.

Product	Description
SE2M-304 Maintenance Transmitter	A test transmitter, includes a lanyard pull.
SE2U-304 User Transmitter	Includes supervision tracking.
SE2S-SN-304 Security Transmitter	Includes a lanyard pull, supervision tracking, and silent alarm.
SE3U-304 User Transmitter	For system users (subscribers). Operates at 304 MHz.
SE3S-304 Security Transmitter	For security personnel. Includes silent alarm. Operates at 304 MHz.
SE3M-304 Maintenance Transmitter	Test transmitter, operates at 304 MHz.
SE88-30S-304 Panic Transmitter	Sends a supervisory signal every 32 seconds.
SE88-60M-304 Panic Transmitter	Sends a supervisory signal every 65 minutes.
SE3401 Point Tracking Transmitter	Includes supervision tracking.

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific: Robert Bosch (SEA) Pte Ltd, Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6258 5511 Fax: +65 6571 2698 apr.securitysystems@bosch.com www.boschsecurity.com	Represented by
---	-----------------------